

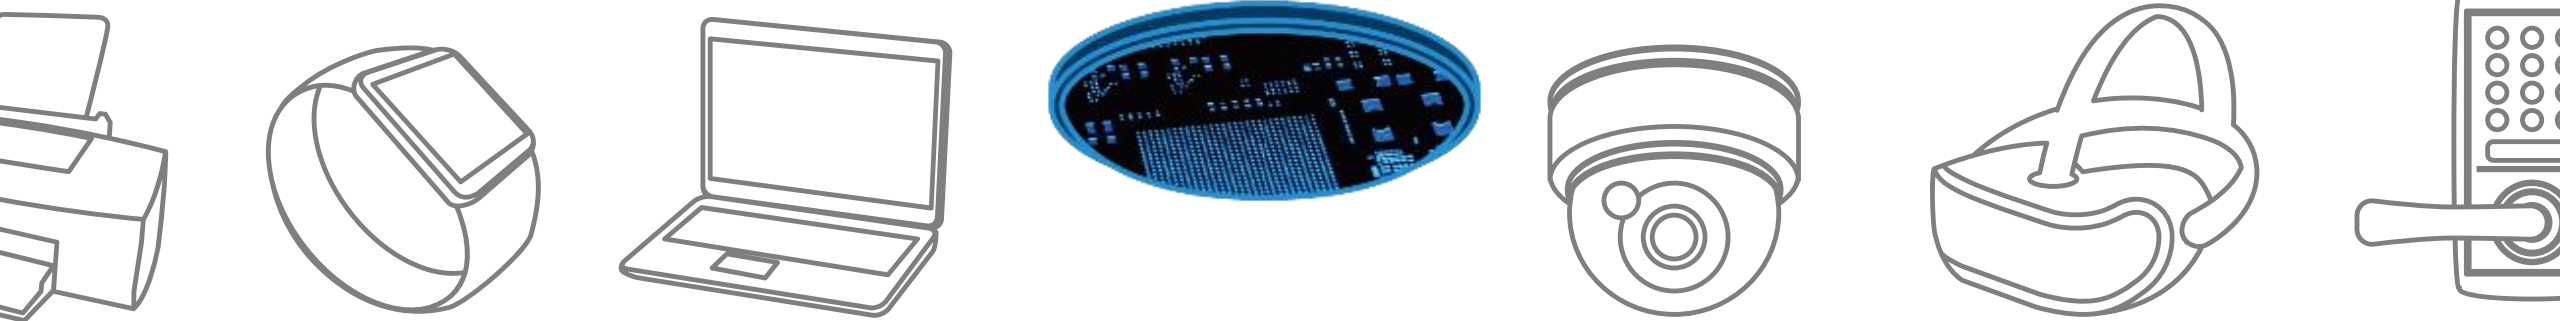


LED Lighting

Solution Proposal by Toshiba







Toshiba Electronic Devices & Storage Corporation provides comprehensive device solutions to customers developing new products by applying its thorough understanding of the systems acquired through the analysis of basic product designs.



Block Diagram

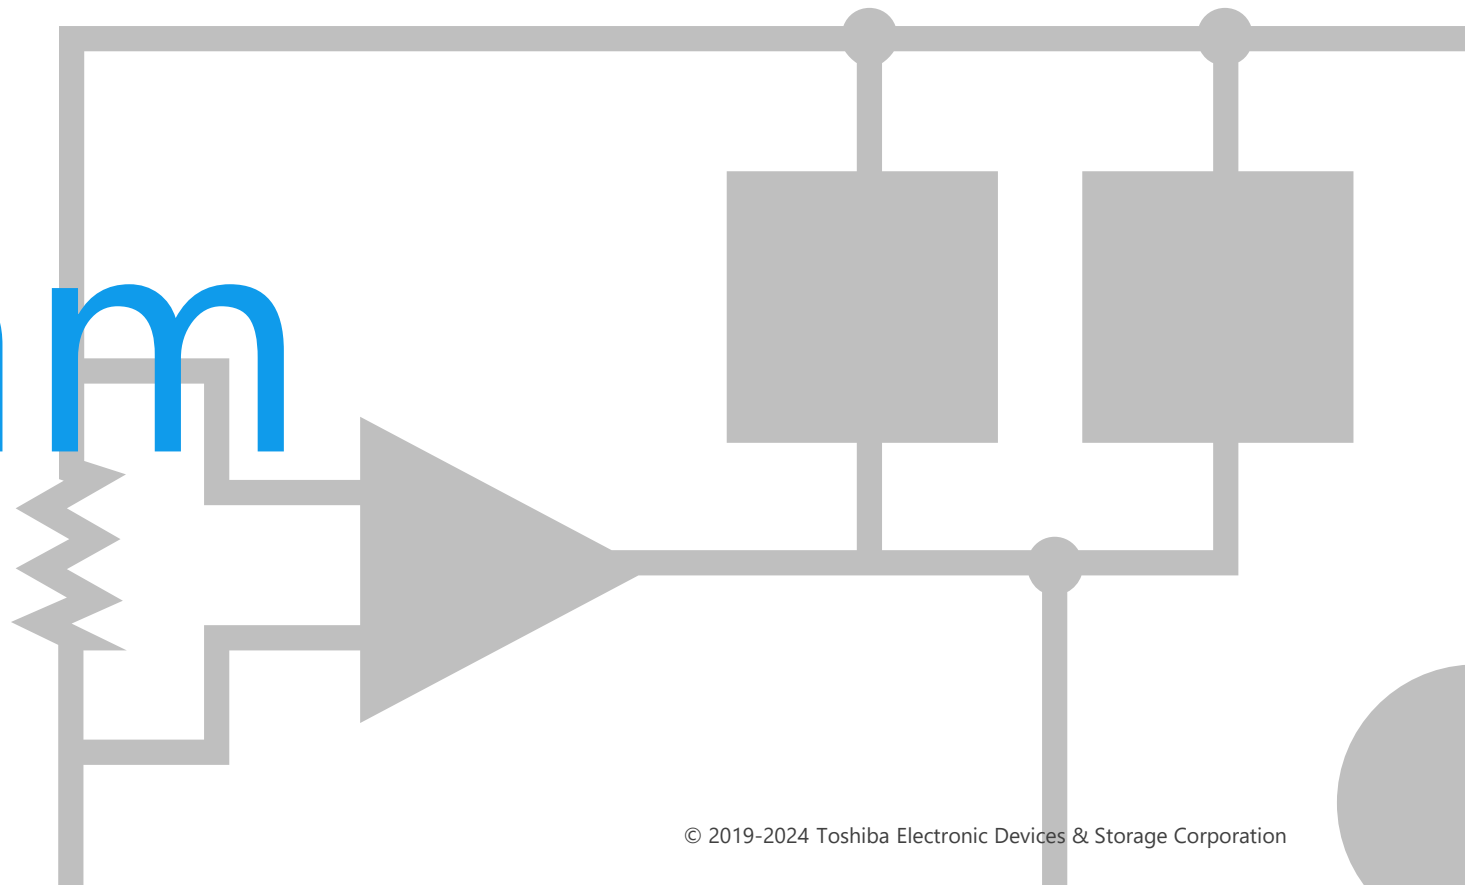


LED lighting Overall block diagram

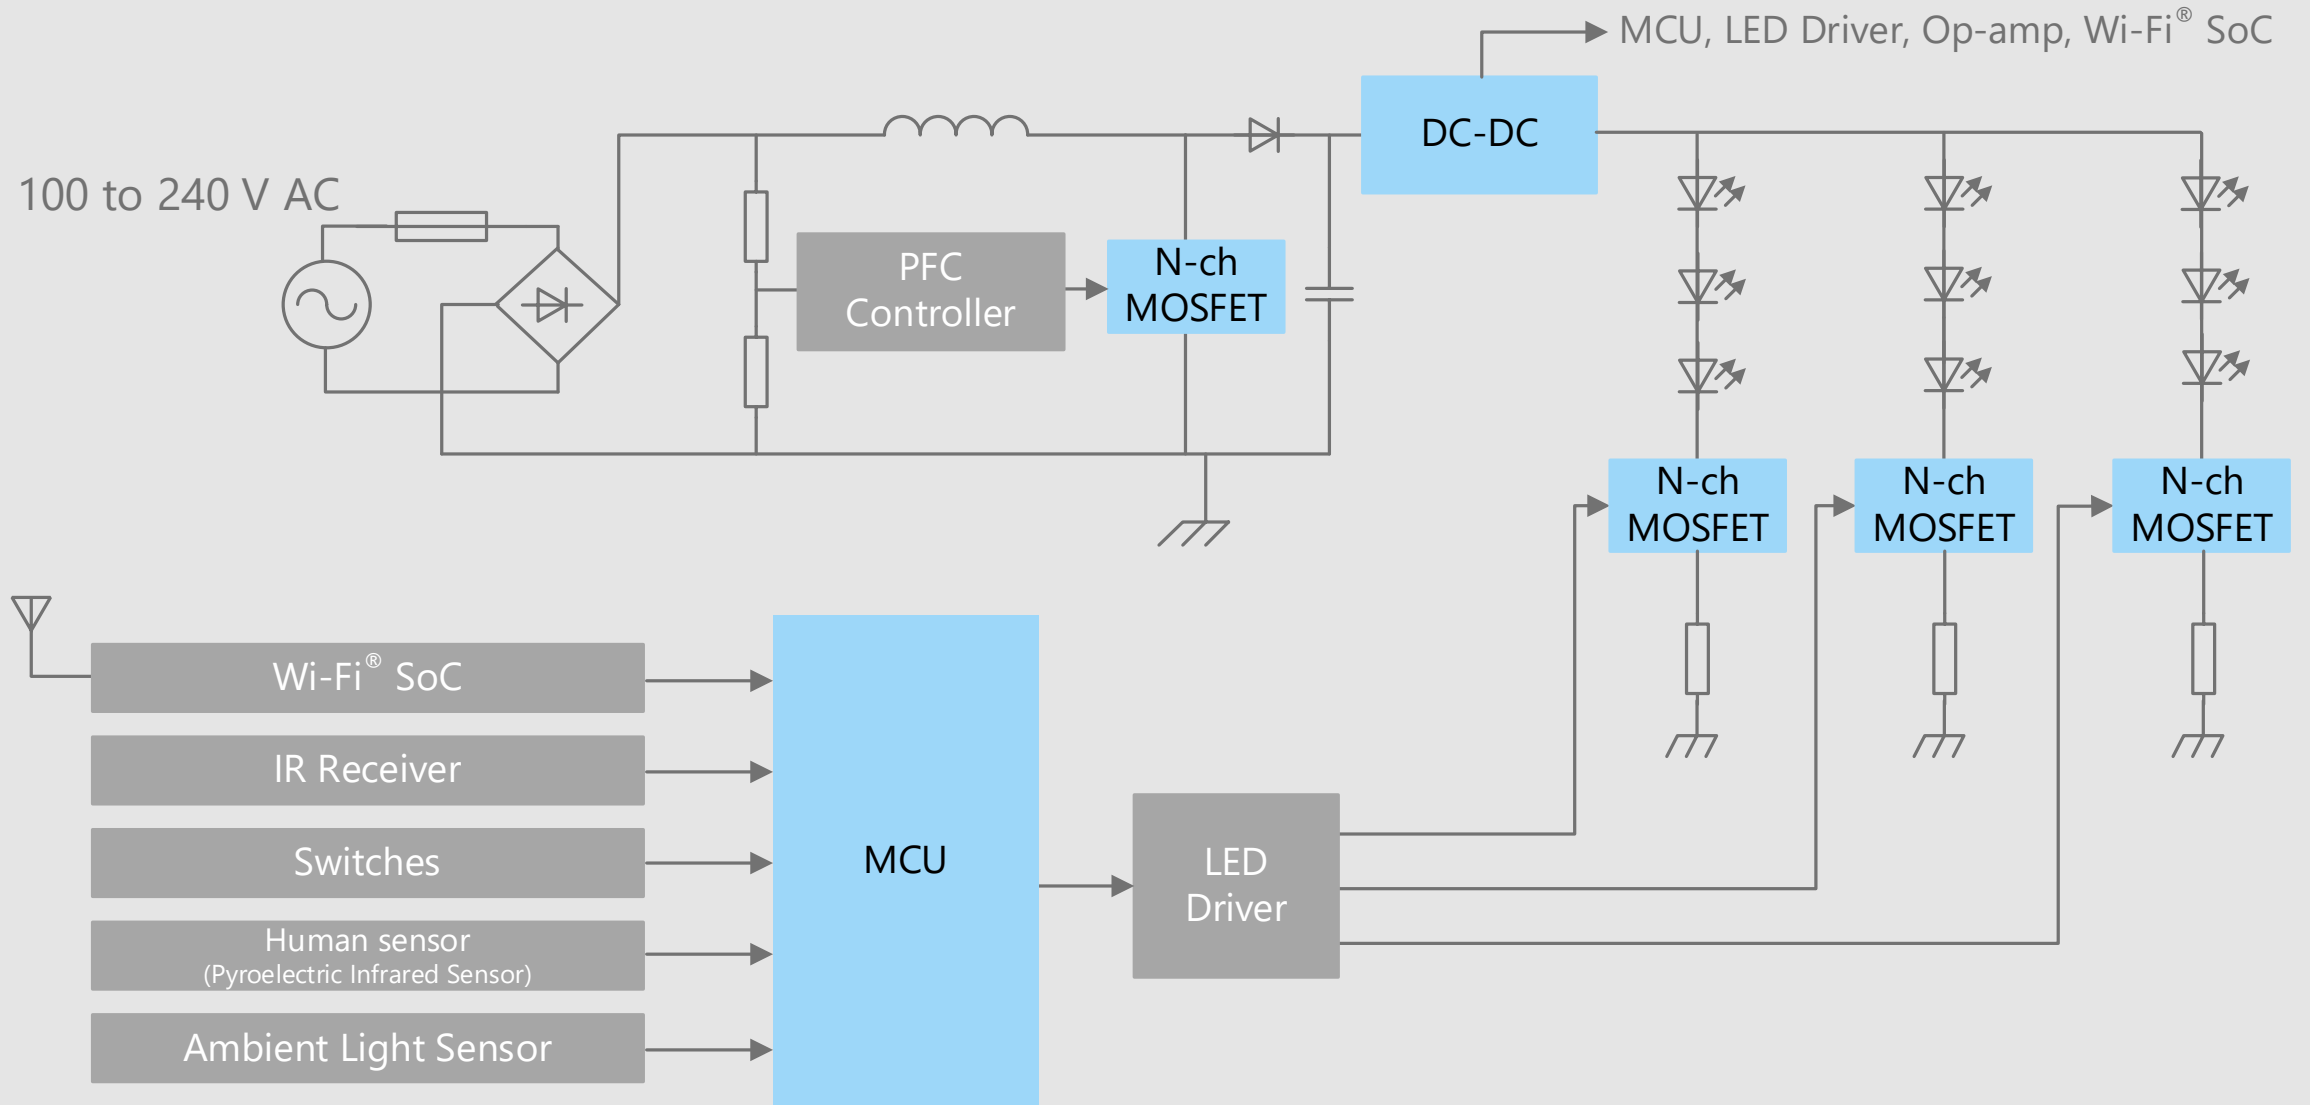

LED lighting Detail of power supply unit (1)

PFC circuit

Active type

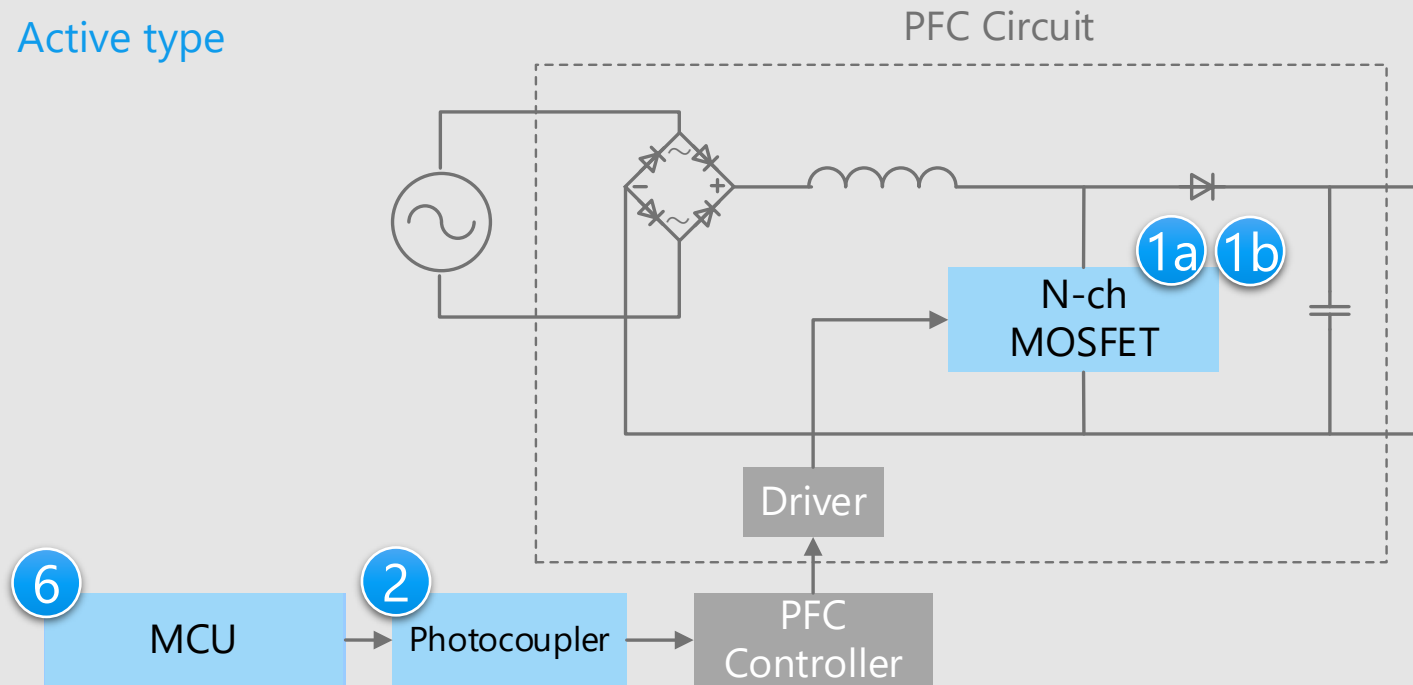

* Click on the number in the circuit diagram to jump to the detailed description page

Criteria for device selection

- MOSFET is suitable for active type PFC circuit.
- The transistor output photocoupler is for signal isolation.
- An MCU can also be used for PFC control.

Proposals from Toshiba


- **Suitable for high efficiency power supply switching**
DTMOSVI Series MOSFET
SiC MOSFET
- **High current transfer ratio and high temperature operation are realized**
Transistor output photocoupler
- **Built-in analog interface for sensing, low power consumption and efficient software development**

MCU M3H Group


LED lighting Detail of power supply unit (2)

DC-DC converter circuits

Flyback type

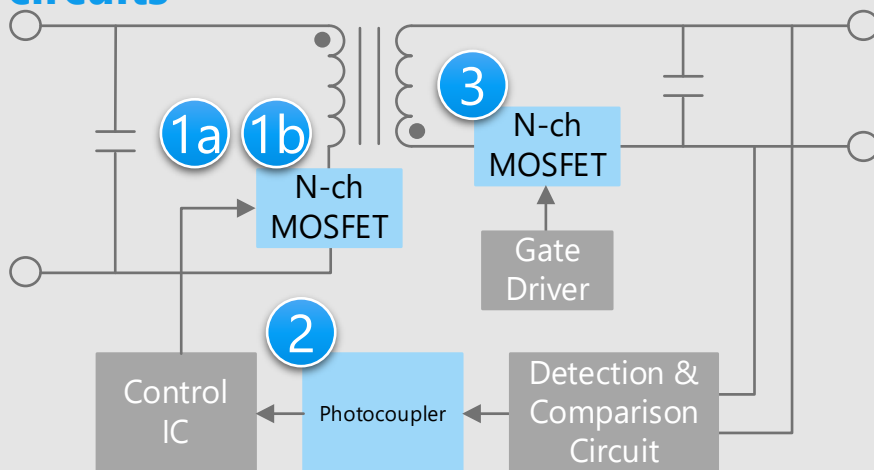

Forward type

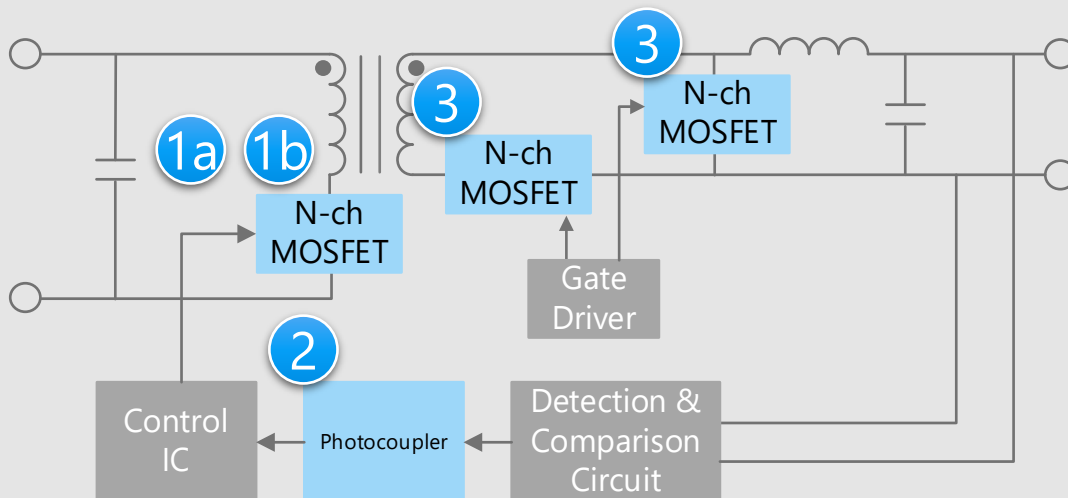

* Click on the number in the circuit diagram to jump to the detailed description page

Criteria for device selection

- By using a MOSFET with low on-resistance and high heat dissipation efficiency, a set having low heat generation and low power consumption is realized.
- The transistor output photocoupler is for signal isolation.
- Small package products contribute to the reduction of circuit board area.

Proposals from Toshiba

- **Suitable for high efficiency power supply switching**
DTMOSVI Series MOSFET
SiC MOSFET
- **High current transfer ratio and high temperature operation are realized**
Transistor output photocoupler
- **MOSFET with low on-resistance and high heat dissipation efficiency**
U-MOS Series MOSFET


1a

1b

2

3

LED drive circuit

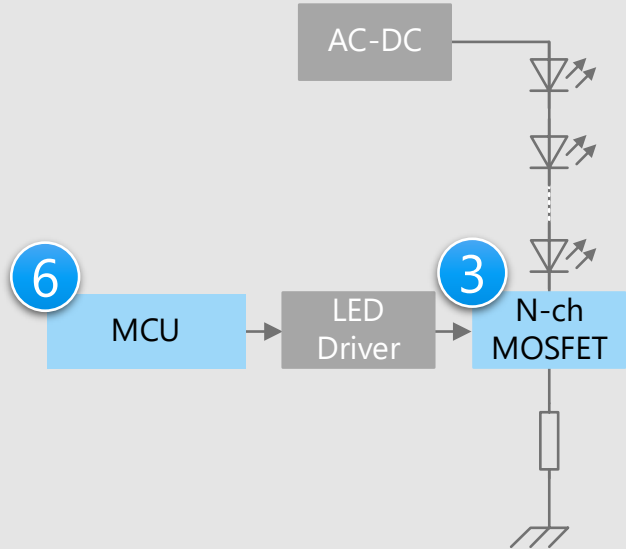

* Click on the number in the circuit diagram to jump to the detailed description page

Criteria for device selection


- By using a MOSFET with low on-resistance and high heat dissipation efficiency, a set having low heat generation and low power consumption is realized.

Proposals from Toshiba


- **MOSFET with low on-resistance and high heat dissipation efficiency**
U-MOS Series MOSFET 3
- **Built-in analog interface for sensing, low power consumption and efficient software development**
MCU M3H Group 6

LED lighting Detail of sensor signal input unit

Human sensor circuit

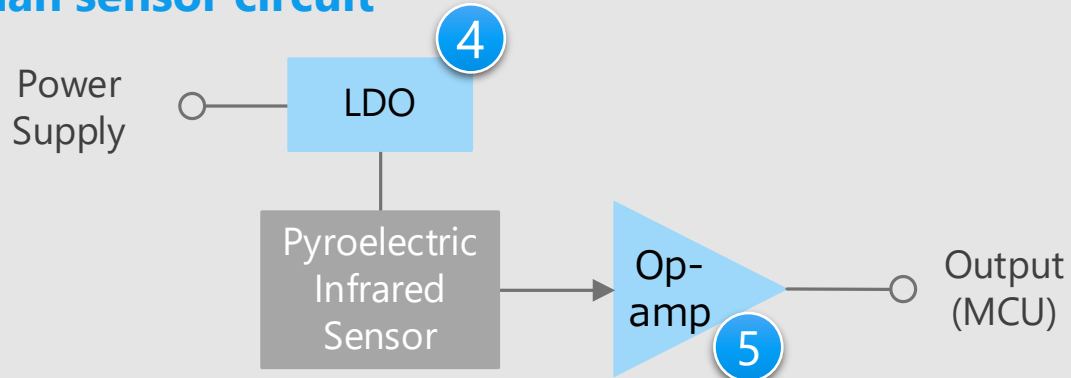

Ambient light sensor circuit

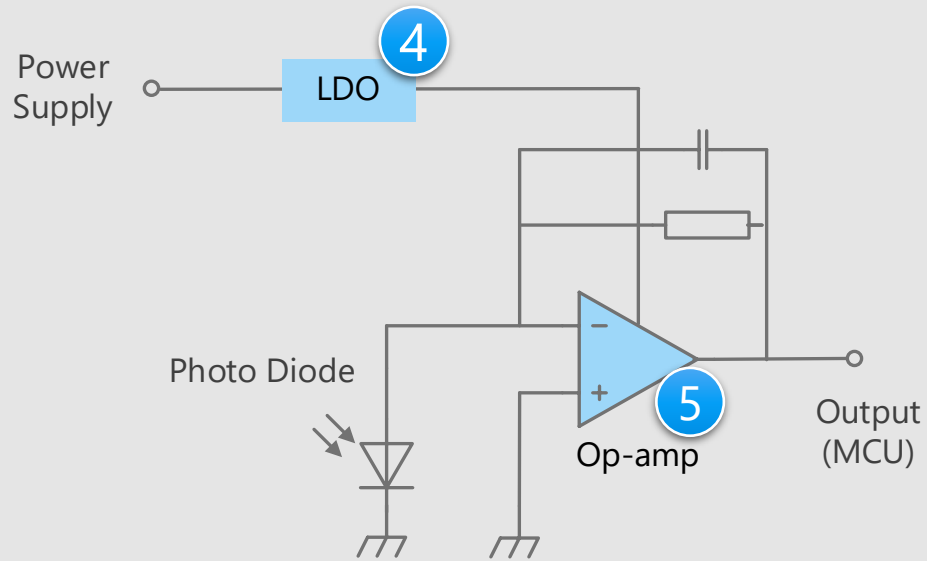

Criteria for device selection


- PSRR (Power Supply Rejection Ratio) of LDO regulator is an important parameter for sensor circuits.
- The operational amplifier should be low current consumption or low noise device.

Proposals from Toshiba

- **Supply the power with low noise**
Small surface mount LDO regulator
- **Amplification of detected weak signal with low noise**
Low current consumption op-amp
/ Low noise op-amp


* Click on the blue circled numbers above to view detailed descriptions.

Recommended Devices

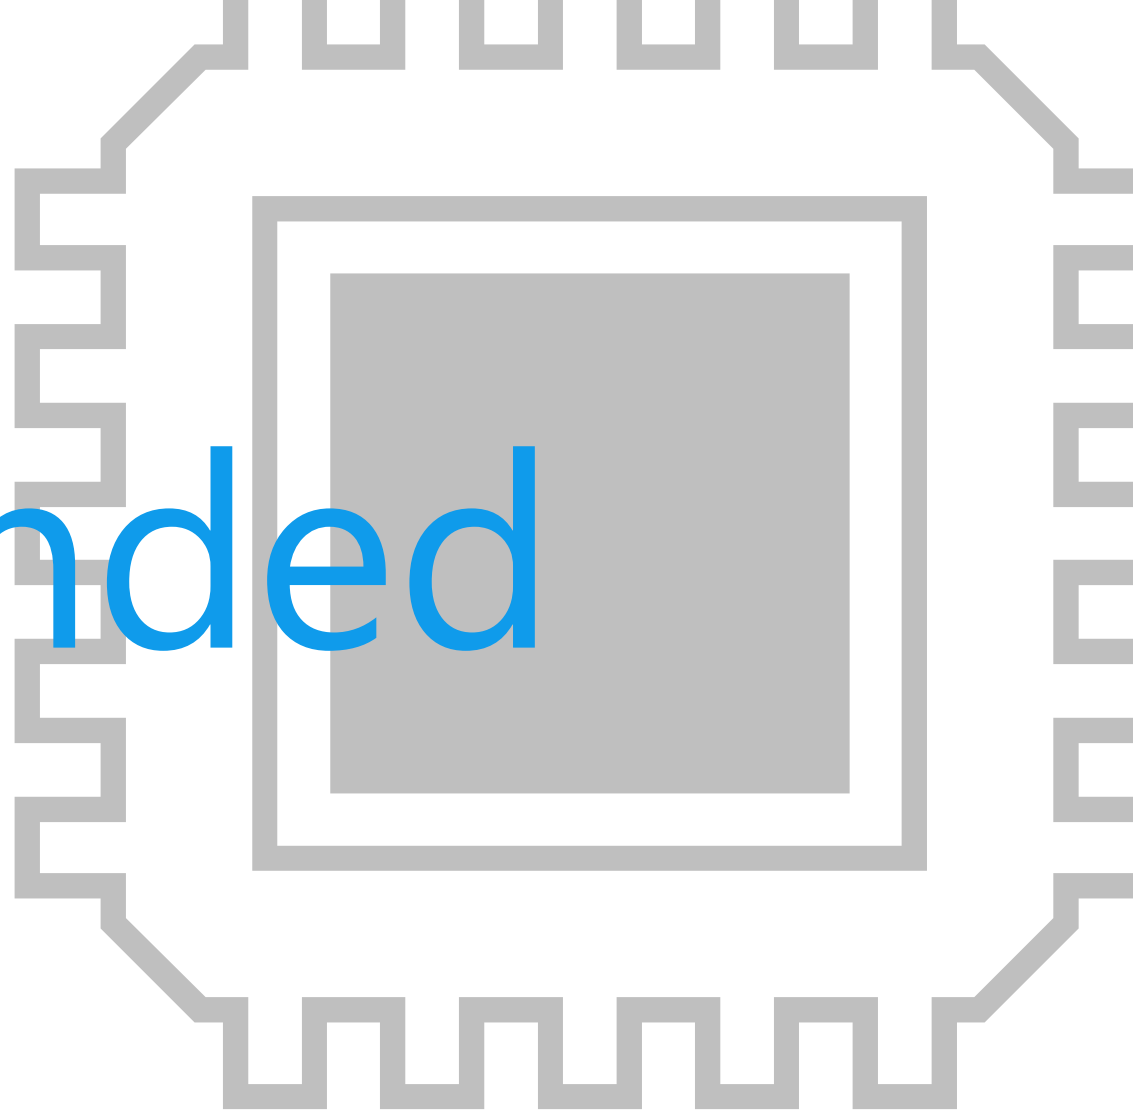


Device solutions to address customer needs

As described above, in the design of LED lighting, “**High efficiency**”, “**Low power consumption / Low heat generation of set**” and “**Miniaturization of circuit boards**” are important factors. Toshiba’s proposals are based on these three solution perspectives.

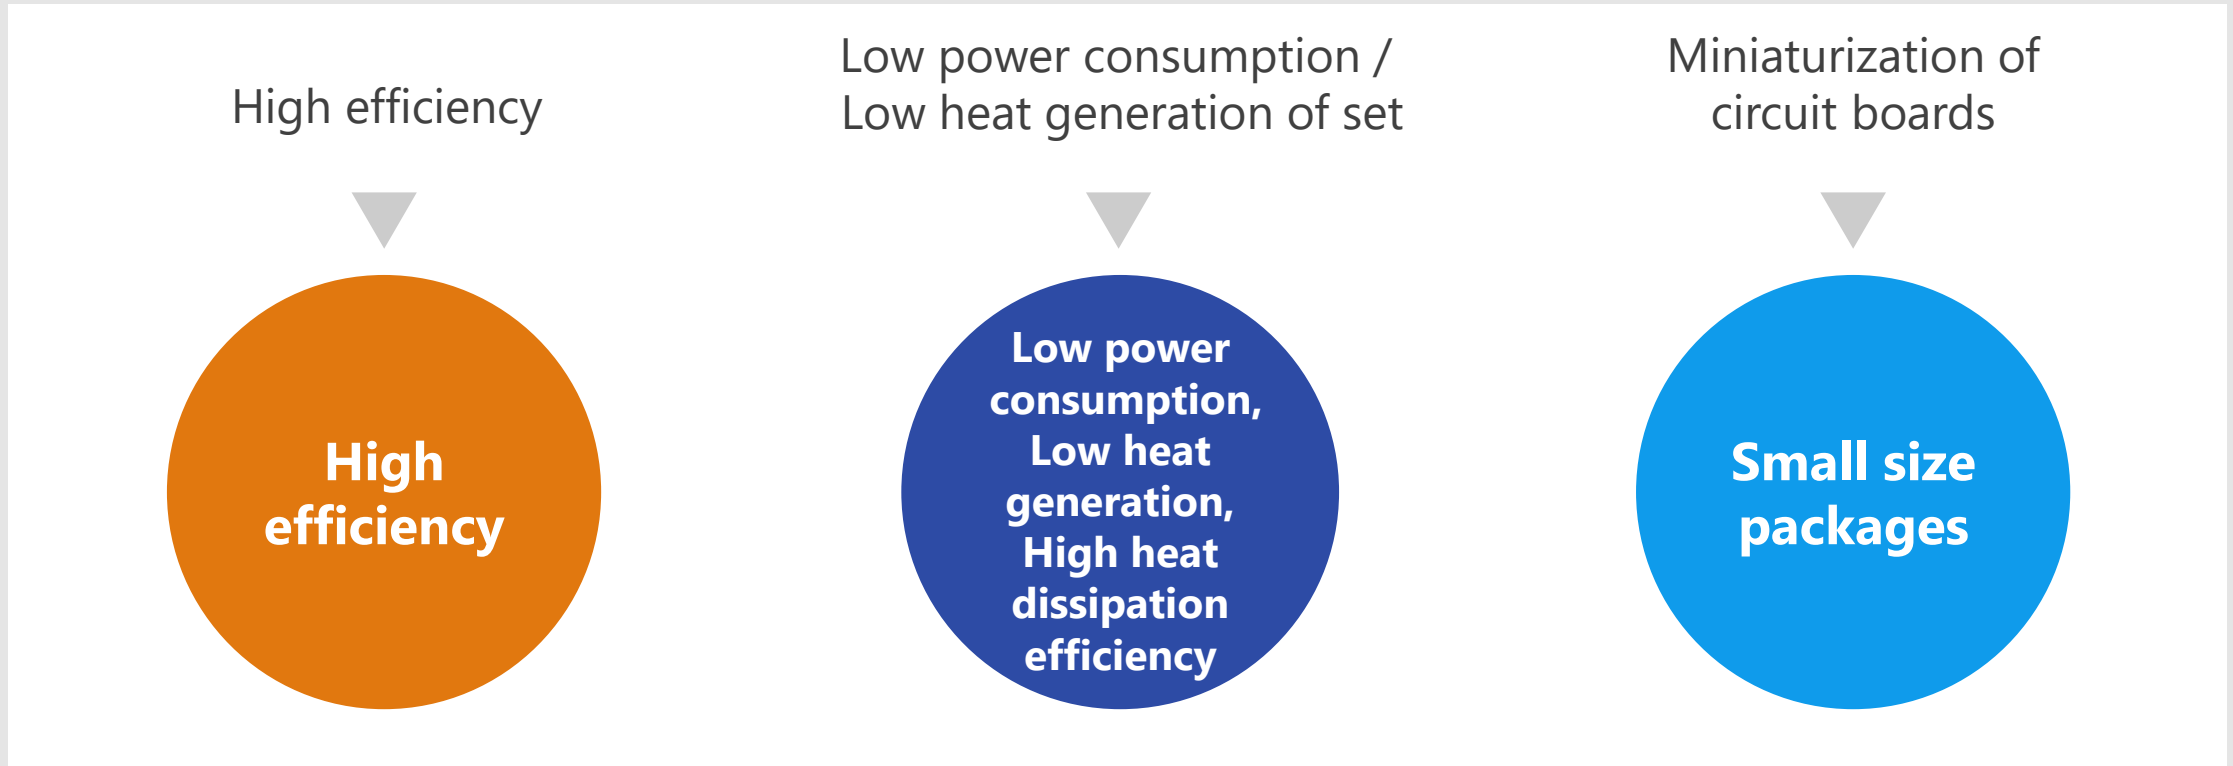

Device solutions to address customer needs




1a	DTMOSVI Series MOSFET	●	●	●
1b	SiC MOSFET	●	●	
2	Transistor output photocoupler			●
3	U-MOS Series MOSFET	●	●	●
4	Small surface mount LDO regulator	●	●	●
5	Low current consumption op-amp / Low noise op-amp			●
6	MCU M3H Group	●	●	●

Value provided

Realizes improvement of power supply efficiency by 40 % (comparison of Toshiba's conventional products) reduction of $R_{DS(ON)} \times Q_{gd}$

1 $R_{DS(ON)} \times Q_{gd}$ reduced by 40 %

Using a single epitaxial process, the figure of merit $R_{DS(ON)} \times Q_{gd}$ was reduced by 40 % by optimizing the structure (comparison of Toshiba's DTMOSIV-H 600 V products). By realizing low $R_{DS(ON)} \times Q_{gd}$, device switching loss was reduced contributing to improvement in power supply efficiency of equipment.

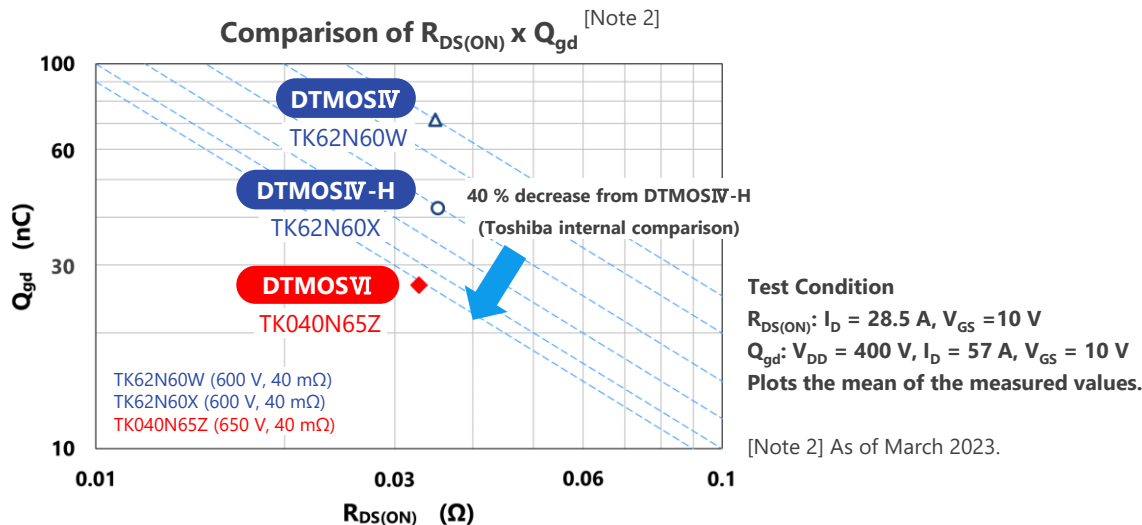

2 R_{onA} reduced by 18 %

The figure of merit R_{onA} of the latest generation [Note1] DTMOSVI has been reduced by 18 % compared with the previous generation (Toshiba's DTMOSVI 650 V products). Achieving low on-resistance while maintaining high voltage contributes to high efficiency of equipment.

[Note1] As of March 2023

Lineup

Part number		TK065U65Z	TK040N65Z
Package		TOLL 	TO-247 
V_{DS} [V]		650	650
I_D [A]		38	57
$R_{DS(ON)}$ [Ω] @ $V_{GS} = 10 \text{ V}$	Typ.	0.051	0.033
	Max	0.065	0.04
Polarity		N-ch	N-ch


[Return to Block Diagram TOP](#)

Value provided

The performance index $R_{DS(ON)} \times Q_{gd}$, which shows switching characteristics, is reduced by 80 % compared with Toshiba's existing products. This contributes to lower loss of power supply in application.

1 Low $R_{DS(ON)} \times Q_{gd}$

For the latest products, the performance index $R_{DS(ON)} \times Q_{gd}$, which shows the relation between conduction loss and switching loss, is reduced by 80 % compared with Toshiba's existing products by optimizing its cell structure.

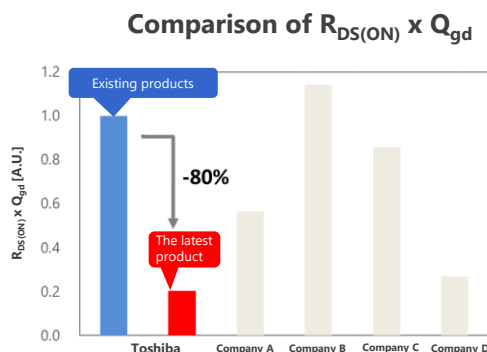

Measurement conditions

$R_{DS(ON)}$: $V_{GS} = 18 \text{ V}$, $I_D = 20 \text{ A}$, $T_a = 25 \text{ }^\circ\text{C}$


Q_{gd} : $V_{DD} = 800 \text{ V}$, $V_{GS} = 18 \text{ V}$, $I_D = 20 \text{ A}$, $T_a = 25 \text{ }^\circ\text{C}$

(Toshiba internal comparison, as of May 2022)

2 Wide V_{GSS} specification

The specification of the gate-source voltage is -10 to 25 V, which is wider than that of other companies' products, allows a wider margin for the drive voltage and makes gate drive design considering overshoot easier. (Recommended drive voltage: 18 V)

Comparison of V_{GSS} specification

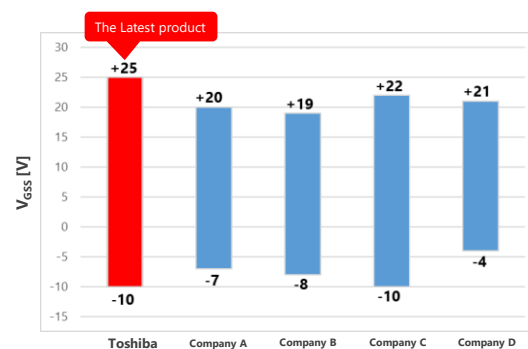

(Toshiba internal comparison based on the datasheet of each company's 1200 V voltage products as of July 2023.)

3 Built-in Schottky barrier diode

Built-in Schottky barrier diode reduces V_{DSF} during reverse conduction to 1.35 V (typ.). In addition, by energizing the Schottky barrier diode, fluctuation in $R_{DS(ON)}$ caused by the spread of defects is suppressed.

Lineup

Part number	TW107N65C	TW140N120C	TW107N65C	TW140Z120C
Package	TO-247 		TO-247-4L(X) 	
V_{DSS} [V]	650	1200	650	1200
I_D [A]	20	20	20	20
$R_{DS(ON)}$ [Ω] @ $V_{GS} = 18 \text{ V}$	Typ.	0.107	0.140	0.107
	Max	0.145	0.182	0.152
Polarity	N-ch	N-ch	N-ch	N-ch


[Return to Block Diagram TOP](#)

Value provided

High CTR (Current Transfer Ratio) is realized even in low input current range ($I_F = 0.5 \text{ mA}$).

1 High current transfer ratio

The TLP383 and TLP293 are high isolation photocouplers that optically couple a phototransistor and high output infrared LED. Compared to Toshiba's conventional products (TLP385), higher CTR (Current Transfer Ratio) in low input current range (@ $I_F = 0.5 \text{ mA}$) is realized.

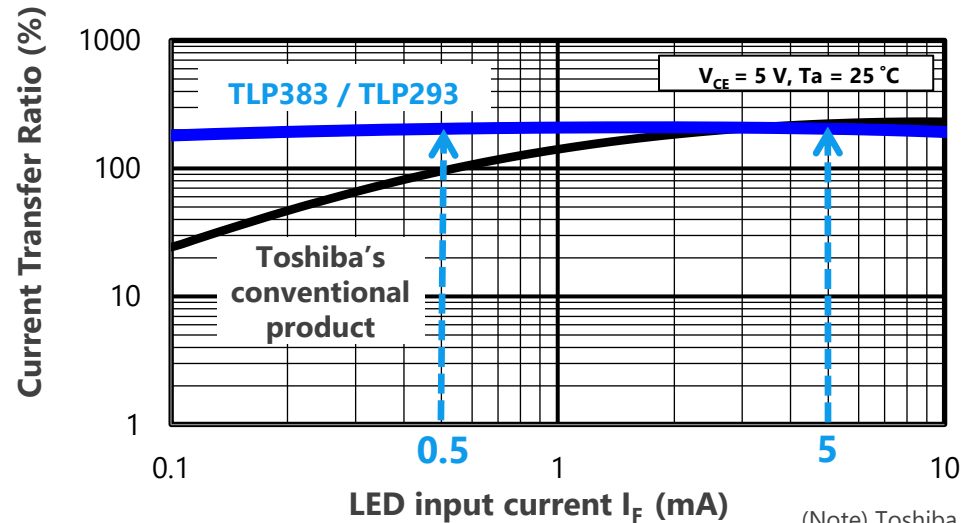

(Note) Toshiba internal comparison

2 Designed for high temperature operation

The TLP383 and TLP293 are designed to operate even under severe ambient temperature conditions.

Lineup

Part number	TLP383	TLP293	TLP385
Package	4pin SO6L 	SO4 	4pin SO6L 
BV_S [Vrms]	5000	3750	5000
T_{opr} [°C]	-55 to 125	-55 to 125	-55 to 110

[Return to Block Diagram TOP](#)

Value provided

Contributes to lower heat generation of system by providing low on-resistance and a highly heat dissipation package (DSOP Advance).

1 Low $R_{DS(ON)}$ (on-resistance)

By keeping the $R_{DS(ON)}$ (drain-source on-resistance) low, heat build-up and power consumption can be reduced. Products are prepared from on-resistance of 0.36 m Ω (Typ.).

2 Small Q_{OSS} (output charge)


Contributes low loss due to small Q_{OSS} . TPWR8004PL's performance index $R_{DS(ON)} \times Q_{OSS}$ is deducted to 5 % [Note] than competitor's products.

3 Variety of packages


Adding SOP Advance of industry standard package, DSOP Advance of double-side heat dissipation package on same footprint had been prepared. Packages can be selected according to the set.

[Note] Comparison with competitor's product with equivalent ratings. As of March 2023. Based on Toshiba's measurement data.

Low on-resistance TPWR6003PL

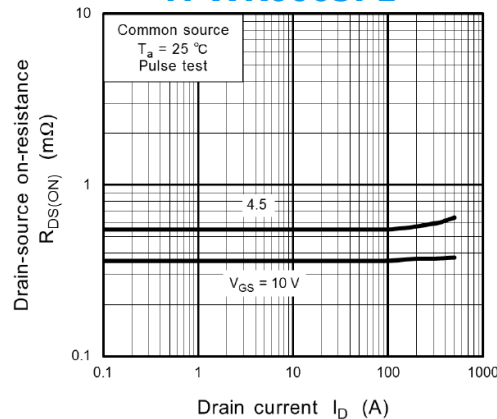

$R_{DS(ON)} \times Q_{OSS}$ TPWR8004PL [Note]

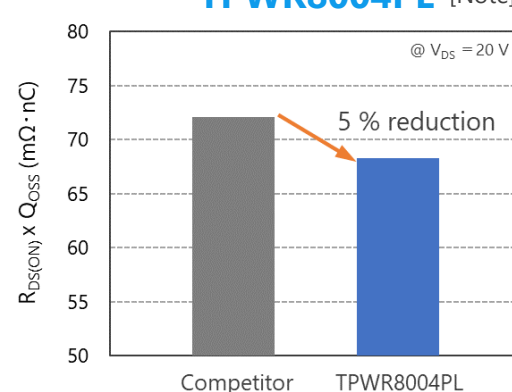

Lineup

Part number	TPWR6003PL	TPWR8004PL	TPHR7404PU	TPHR8504PL
Package	DSOP Advance 		SOP Advance 	
V_{DS} [V]	30	40	40	40
I_D [A]	150 (412*)	150 (340*)	150 (400*)	150 (340*)
$R_{DS(ON)}$ [m Ω] @ $V_{GS} = 10$ V	Typ.	0.36	0.65	0.51
	Max	0.6	0.8	0.74
Polarity	N-ch	N-ch	N-ch	N-ch
Generation	U-MOSIX-H	U-MOSIX-H	U-MOSIX-H	U-MOSIX-H

*: Silicon limit

[Return to Block Diagram TOP](#)

Value provided

Lineup of low on-resistance products is provided and improvement of trade-off between on-resistance and capacitance contribute to higher efficiency of power supply.

1 High speed switching


Reducing switching loss through high speed operation contributes to higher power supply efficiency.

2 Small gate input charge

Small gate input charge reduces the performance required for driving the MOSFET. It contributes to improving switching characteristics.

3 Low on-resistance

By reducing the on-resistance between the drain and source, heat generation and power consumption can be kept low.

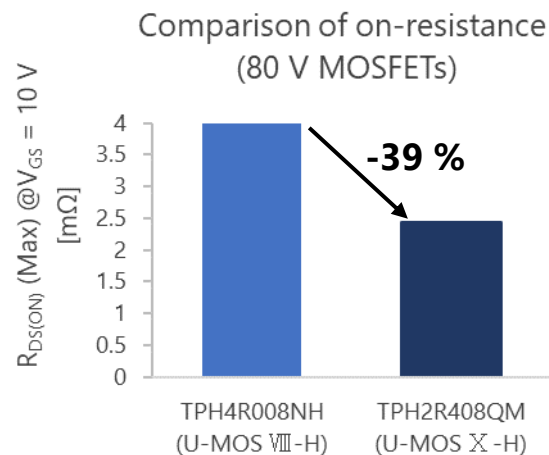

[Note] Toshiba internal comparison

Lineup

Part number	TPH2R408QM	TPH4R008QM	TPN8R408QM	TPN12008QM	TPN19008QM	TK5R1P08QM	TK6R9P08QM	
Package	SOP Advance(N) 		TSOP Advance 			DPAK 		
V _{DSS} [V]	80	80	80	80	80	80	80	
I _D [A]	120 (200*)	86 (140*)	32 (77*)	26 (60*)	34 (38*)	84 (105*)	62 (83*)	
R _{DS(ON)} [mΩ] @V _{GS} = 10 V	Typ.	1.9	3.1	6.5	9.6	14.7	4.2	5.5
	Max	2.43	4	8.4	12.3	19	5.1	6.9
Polarity	N-ch	N-ch	N-ch	N-ch	N-ch	N-ch	N-ch	
Generation	U-MOSX-H	U-MOSX-H	U-MOSX-H	U-MOSX-H	U-MOSX-H	U-MOSX-H	U-MOSX-H	

*: Silicon limit

[Return to Block Diagram TOP](#)

Value provided

Wide lineup from general purpose type to small package type are provided.
Contribute to realize a stable power supply.

1 Low dropout voltage

The originally developed latest process significantly improved the dropout voltage characteristics.


2 High PSRR Low output noise voltage

Many product series that realize both high PSRR (Power Supply Rejection Ratio) and low output noise voltage characteristics are provided. They are suitable for stable power supply for analog circuit.


3 Low current consumption

0.34 μA of $I_{B(ON)}$ is realized by utilizing CMOS process and unique circuit technology.
(TCR3U Series)

Low dropout voltage

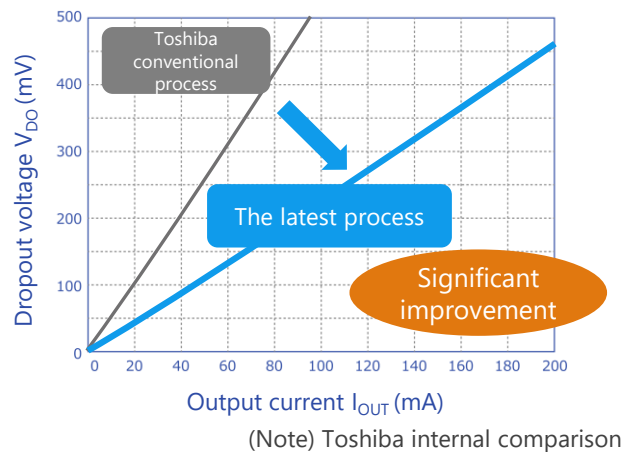

Rich package lineup

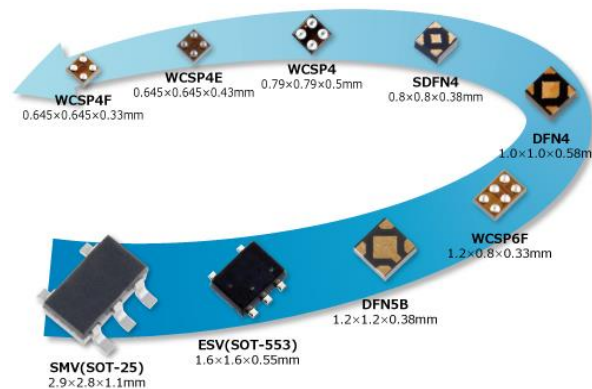

Lineup

Part number	TCR15AG Series	TCR13AG Series	TCR8BM Series	TCR5BM Series	TCR5RG Series	TCR3RM Series	TCR3U Series	TCR2L Series	TAR5 Series
Features	Low dropout voltage High PSRR				High PSRR Low noise Low current consumption		Low current consumption		15 V Input voltage Bipolar type
I_{OUT} (Max) [A]	1.5	1.3	0.8	0.5		0.3		0.2	
PSRR (Typ.) [dB] @f = 1 kHz	95	90	98	98	100	100	70	-	70
I_B (Typ.) [μA]	25	56	20	19	7	7	0.34	1	170

[Return to Block Diagram TOP](#)

Value provided

Lineup includes low current consumption type that contributes to low power consumption and a low noise type that maximizes the performance of high performance sensors.

1 Low voltage operation

We have a lineup of low power supply voltage-driven operational amplifiers using CMOS process.

2 Low current consumption (TC75S102F) $I_{DD} = 0.27 \text{ } [\mu\text{A}]$ (Typ.)

CMOS processes have been used to achieve lower current consumption.

3 Low noise (TC75S67TU) $V_{NI} = 6.0 \text{ } [\text{nV}/\sqrt{\text{Hz}}]$ (Typ.) @ $f = 1 \text{ kHz}$


This CMOS operational amplifier can amplify minute signals detected by various sensors ^[Note] with very low noises. By optimizing the process, the equivalent input noise voltage has been reduced.

[Note] Sensor types: vibration, shock, acceleration, pressure, infrared, temperature, etc.

TC75S102F

Current Consumption Characteristic
(Toshiba internal comparison)

Low current consumption product TC75S102F

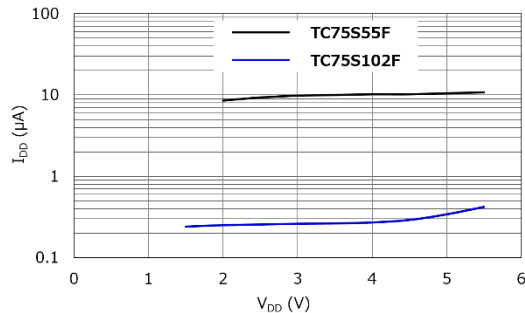


TC75S67TU

Noise Characteristic
(Toshiba internal comparison)

Reduce 1/f noise (10 Hz) by 86 % from our normal products

$V_{NI} - f$ @ $T_a = 25 \text{ } ^\circ\text{C}$, $V_{DD} = 3.3 \text{ V}$

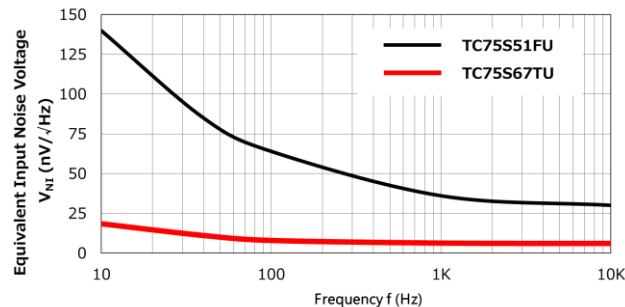

Lineup

Part number	TC75S102F	TC75S67TU
Package	SMV 	UFV 
$V_{DD} - V_{SS}$ [V]	1.5 to 5.5	2.2 to 5.5
V_{IO} (Max) [mV]	1.3	3
CMV_{IN} (Max) [V]	V_{DD}	1.4 (@ $V_{DD} = 2.5 \text{ V}$)
I_{DD} (Typ. / Max) [μA]	0.27 / 0.46 (@ $V_{DD} = 1.5 \text{ V}$)	430 / 700 (@ $V_{DD} = 2.5 \text{ V}$)
V_{NI} (Typ.) [$\text{nV}/\sqrt{\text{Hz}}$] @ $f = 1 \text{ kHz}$	-	6

[Return to Block Diagram TOP](#)

Value provided

AD converters, timers, and PWM [Note 1] output circuit are built in. The system-control runs at low power.

[Note 1] Pulse Width Modulation

1 Built-in Arm® Cortex®-M3 CPU core

The product lineup is equipped with Arm Cortex-M3 core (maximum operation frequency of 120 MHz). Various development tool and their partners allow users many options.

2 Enhancement of system functionality

Built-in multifunctional timers and A-PMD [Note 2] control circuit generate PWM. AD converters with monitoring capabilities are also built in. They provide efficient monitoring of the various parts of the system and lighting control. Also, products with flash ROM 1024KB support FOTA [Note 3].


[Note 2] Advanced Programmable Motor Control Circuit

[Note 3] Firmware update Over The Air

3 Small package, low power consumption


Several low power modes are available to support low power consumption. Package lineup of LQFP144 from small LQFP64 is provided.

TMPM3HQF10BFG
TMPM3HQFDAFG

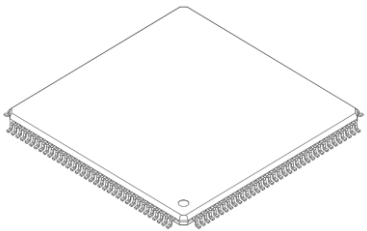


P-LQFP144-2020-0.50-002

TMPM3HNF10BFG
TMPM3HNFDAFG



P-LQFP100-1414-0.50-002

TMPM3HLF10BUG
TMPM3HLFDAUG



P-LQFP64-1010-0.50-003

Lineup

Part number	M3H(2) M3H(1)	TMPM3HQF10BFG TMPM3HQFD/Z/YAFG	TMPM3HNF10BFG TMPM3HNFD/Z/YAFG	TMPM3HLF10BUG TMPM3HLFD/Z/YAUG
Max. operation frequency		120 MHz		
ROM (flash)	M3H(2) M3H(1)	1024 KB (512 KB x 2 area, compatible with FOTA) 512 / 384 / 256 KB		
RAM	M3H(2) M3H(1)	130 KB (with parity) 66 KB (with parity)		
Timer		32bit x 8ch (16bit x 16ch)		
AD converter		21ch (12bit)	17ch (12bit)	12ch (12bit)
Serial communication		UART: 8ch, I ² C: 4ch, TSPI: 5ch	UART: 8ch, I ² C: 3ch, TSPI: 4ch	UART: 7ch, I ² C: 2ch, TSPI: 1ch
Package		P-LQFP144-2020-0.50-002	P-LQFP100-1414-0.50-002	P-LQFP64-1010-0.50-003

[Return to Block Diagram TOP](#)

If you are interested in these products and have questions or comments about any of them, please do not hesitate to contact us below:

Contact address: <https://toshiba.semicon-storage.com/ap-en/contact.html>



Terms of use

This terms of use is made between Toshiba Electronic Devices and Storage Corporation ("We") and Customer who downloads or uses this Reference Design. Customer shall comply with this terms of use. This Reference Design means all documents and data in order to design electronics applications on which our semiconductor device is embedded.

Section 1. Restrictions on usage

1. This Reference Design is provided solely as reference data for designing electronics applications. Customer shall not use this Reference Design for any other purpose, including without limitation, verification of reliability.
2. Customer shall not use this Reference Design for sale, lease or other transfer.
3. Customer shall not use this Reference Design for evaluation in high or low temperature, high humidity, or high electromagnetic environments.
4. This Reference Design shall not be used for or incorporated into any product or system whose manufacture, use, or sale is prohibited under any applicable laws or regulations.

Section 2. Limitations

1. We reserve the right to make changes to this Reference Design without notice.
2. This Reference Design should be treated as a reference only. WE ARE NOT RESPONSIBLE FOR ANY INCORRECT OR INCOMPLETE DATA AND INFORMATION.
3. Semiconductor devices can malfunction or fail. When designing electronics applications by referring to this Reference Design, Customer is responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of semiconductor devices could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Customer must also refer to and comply with the latest versions of all relevant our information, including without limitation, specifications, data sheets and application notes for semiconductor devices, as well as the precautions and conditions set forth in the "Semiconductor Reliability Handbook".
4. Designing electronics applications by referring to this Reference Design, Customer must evaluate the whole system sufficiently. Customer is solely responsible for applying this Reference Design to Customer's own product design or applications. WE ASSUME NO LIABILITY FOR CUSTOMER'S PRODUCT DESIGN OR APPLICATIONS.
5. WE SHALL NOT BE RESPONSIBLE FOR ANY INFRINGEMENT OF PATENTS OR ANY OTHER INTELLECTUAL PROPERTY RIGHTS OF THIRD PARTIES THAT MAY RESULT FROM THE USE OF THIS REFERENCE DESIGN. NO LICENSE TO ANY INTELLECTUAL PROPERTY RIGHT IS GRANTED BY THIS TERMS OF USE, WHETHER EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE.
6. THIS REFERENCE DESIGN IS PROVIDED "AS IS". WE (a) ASSUME NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (b) DISCLAIM ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO THIS REFERENCE DESIGN, INCLUDING WITHOUT LIMITATION, WARRANTIES OR CONDITIONS OF FUNCTION AND WORKING, WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.

Section 3. Terms and Termination

It is assumed that Customer agrees to any and all this terms of use if Customer downloads or uses this Reference Design. We may, at its sole and exclusive discretion, change, alter, modify, add, and/or remove any part of this terms of use at any time without any prior notice. We may terminate this terms of use at any time and without any cause. Upon termination of this terms of use, Customer shall eliminate this Reference Design. Furthermore, upon our request, Customer shall submit to us a written confirmation to prove elimination of this Reference Design.

Section 4. Export Control

Customer shall not use or otherwise make available this Reference Design for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). This Reference Design may be controlled under the applicable export laws and regulations including, without limitation, the Japanese Foreign Exchange and Foreign Trade Act and the U.S. Export Administration Regulations. Export and re-export of this Reference Design is strictly prohibited except in compliance with all applicable export laws and regulations.

Section 5. Governing Laws

This terms of use shall be governed and construed by laws of Japan, without reference to conflict of law principle.

Section 6. Jurisdiction

Unless otherwise specified, Tokyo District Court in Tokyo, Japan shall be exclusively the court of first jurisdiction for all disputes under this terms of use.

RESTRICTIONS ON PRODUCT USE

- Toshiba Electronic Devices & Storage Corporation, and its subsidiaries and affiliates (collectively "TOSHIBA"), reserve the right to make changes to the information in this document, and related hardware, software and systems (collectively "Product") without notice.
- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before customers use the Product, create designs including the Product, or incorporate the Product into their own applications, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application with which the Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. **TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.**
- **PRODUCT IS NEITHER INTENDED NOR WARRANTED FOR USE IN EQUIPMENTS OR SYSTEMS THAT REQUIRE EXTRAORDINARILY HIGH LEVELS OF QUALITY AND/OR RELIABILITY, AND/OR A MALFUNCTION OR FAILURE OF WHICH MAY CAUSE LOSS OF HUMAN LIFE, BODILY INJURY, SERIOUS PROPERTY DAMAGE AND/OR SERIOUS PUBLIC IMPACT ("UNINTENDED USE").** Except for specific applications as expressly stated in this document, Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, lifesaving and/or life supporting medical equipment, equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices, elevators and escalators, and devices related to power plant. **IF YOU USE PRODUCT FOR UNINTENDED USE, TOSHIBA ASSUMES NO LIABILITY FOR PRODUCT.** For details, please contact your TOSHIBA sales representative or contact us via our website.
- Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- **ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.**
- Product may include products using GaAs (Gallium Arsenide). GaAs is harmful to humans if consumed or absorbed, whether in the form of dust or vapor. Handle with care and do not break, cut, crush, grind, dissolve chemically or otherwise expose GaAs in Product.
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the applicable export laws and regulations including, without limitation, the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. **TOSHIBA ASSUMES NO LIABILITY FOR DAMAGES OR LOSSES OCCURRING AS A RESULT OF NONCOMPLIANCE WITH APPLICABLE LAWS AND REGULATIONS.**

TOSHIBA

* Wi-Fi® is a registered trademark of Wi-Fi Alliance.

* Arm and Cortex are registered trademarks of Arm Limited (or its subsidiaries) in the US and/or elsewhere.

* TXZ+™ is a trademark of Toshiba Electronic Devices & Storage Corporation.

* All other company names, product names, and service names may be trademarks of their respective companies.